



PRODUCT
CATALOGUE **ÖZKA**

INDEX

ÖZKA
BUILT ON EXPERTISE

TYRE READING INFORMATION	17
AGRICULTURAL TYRES	20-43
<i>Radial Tractor Tyres</i>	<i>22-24</i>
<i>Front Tractor Tyres</i>	<i>26-28</i>
<i>Rear Tractor Tyres</i>	<i>29-31</i>
<i>Irrigation Tyres</i>	<i>32</i>
<i>Harvester Tyres</i>	<i>32-33</i>
<i>Flotation Tyres</i>	<i>34-38</i>
<i>Implement Tyres</i>	<i>39-41</i>
<i>Forestry Tyres</i>	<i>42</i>
INDUSTRIAL, EM, OTR TYRES	44-53
<i>Radial Em Tyres</i>	<i>46</i>
<i>Em / Industrial Tyres</i>	<i>46-51</i>
<i>Compactor Tyres</i>	<i>51-52</i>
<i>Forklift Tyres</i>	<i>52</i>
LCV TYRES	54-57
<i>Light Truck & Minibus Tyres</i>	<i>56-57</i>
MPT TYRES	58-61
<i>Military Tyres</i>	<i>60-61</i>
CORRESPONDING TYRE SIZE	64





Built on Expertise since 1991

Özka Tyres, which has been established in 1991, determined its vision as being the leader brand in Turkish market, and as a reputable brand in the global market.



A World Brand

Özka Tyres, which works with more than 400 contracted dealers in Turkey, is on the way to become a world brand providing its high-quality products to more than 80 countries around the World.



Wide Product Range

Özka Tyres provides a wide range of Tractor Front-Rear, Trailer, Harvester, Yard/Field, Caterpillar, Forklift, Panzer, Pick up/Minibus and Radial Tractor tyre groups all around the world in order to satisfy all needs related to agricultural and industrial tyre sector.



R&D Center and Quality Management

Özka Tyres, officially certificated as R&D Center since 2017, produces its products with its expertise as a result of innovative works of R&D Center with 36-engineer team. It internalises Total Quality Managements and practises; ISO 9001, ISO 14001, ISO 45001 and ISO 27001. Thus, it provides product quality, and product safety from raw material procurement to post-shipment controls.



Customer Satisfaction as a Key Principle

Özka Tyres, with its strong, reliable and durable tyres appropriate with national and international standards (TSE, ETRTO, ECE), considers customer satisfaction before and after sales as the fundamental principle. With its Technical Services Team, it responds to proposals, solves complaints and meets requests of customers all around the world in a short time.



Human Resources Power

Özka Tyres, which has about 900 employees, considers human resources as the basis of sustainable growth, and keeps its investments for further improvements. It plans, and practices the attending of its employees to domestic and abroad events; such as expos, workshops and trainings in order to follow the sectoral developments and innovations.

BUILT ON EXPERTISE



OUR CERTIFICATES



OCCUPATIONAL HEALTH AND SAFETY MANAGEMENT



ENVIRONMENTAL MANAGEMENT SYSTEM



QUALITY MANAGEMENT SYSTEM



INFORMATION SECURITY MANAGEMENT SYSTEM

ART MEETS EXPERTISE

INSPIRED BY ANDY WARHOL

The works of Andy Warhol have emerged as a result of reinterpreting objects in everyday life. When you look at his works, you figure out that he uses a type of art where mass production objects are frequently used with a fresh new style.

We, as Özka, share the same perspective with Warhol.

We produce mass production products with innovative ideas to make a difference and also improve ourselves with excellence and professionalism day by day.

This catalogue is a combination of Warhol's art and ÖZKA's perspective of perfection.



özka




QUICKLY CONNECTING TO THE WORLD

RESPONDS TO PROPOSALS,
SOLVES COMPLAINTS AND
MEETS REQUESTS OF CUSTOMERS
ALL AROUND THE WORLD.



ÖZKA

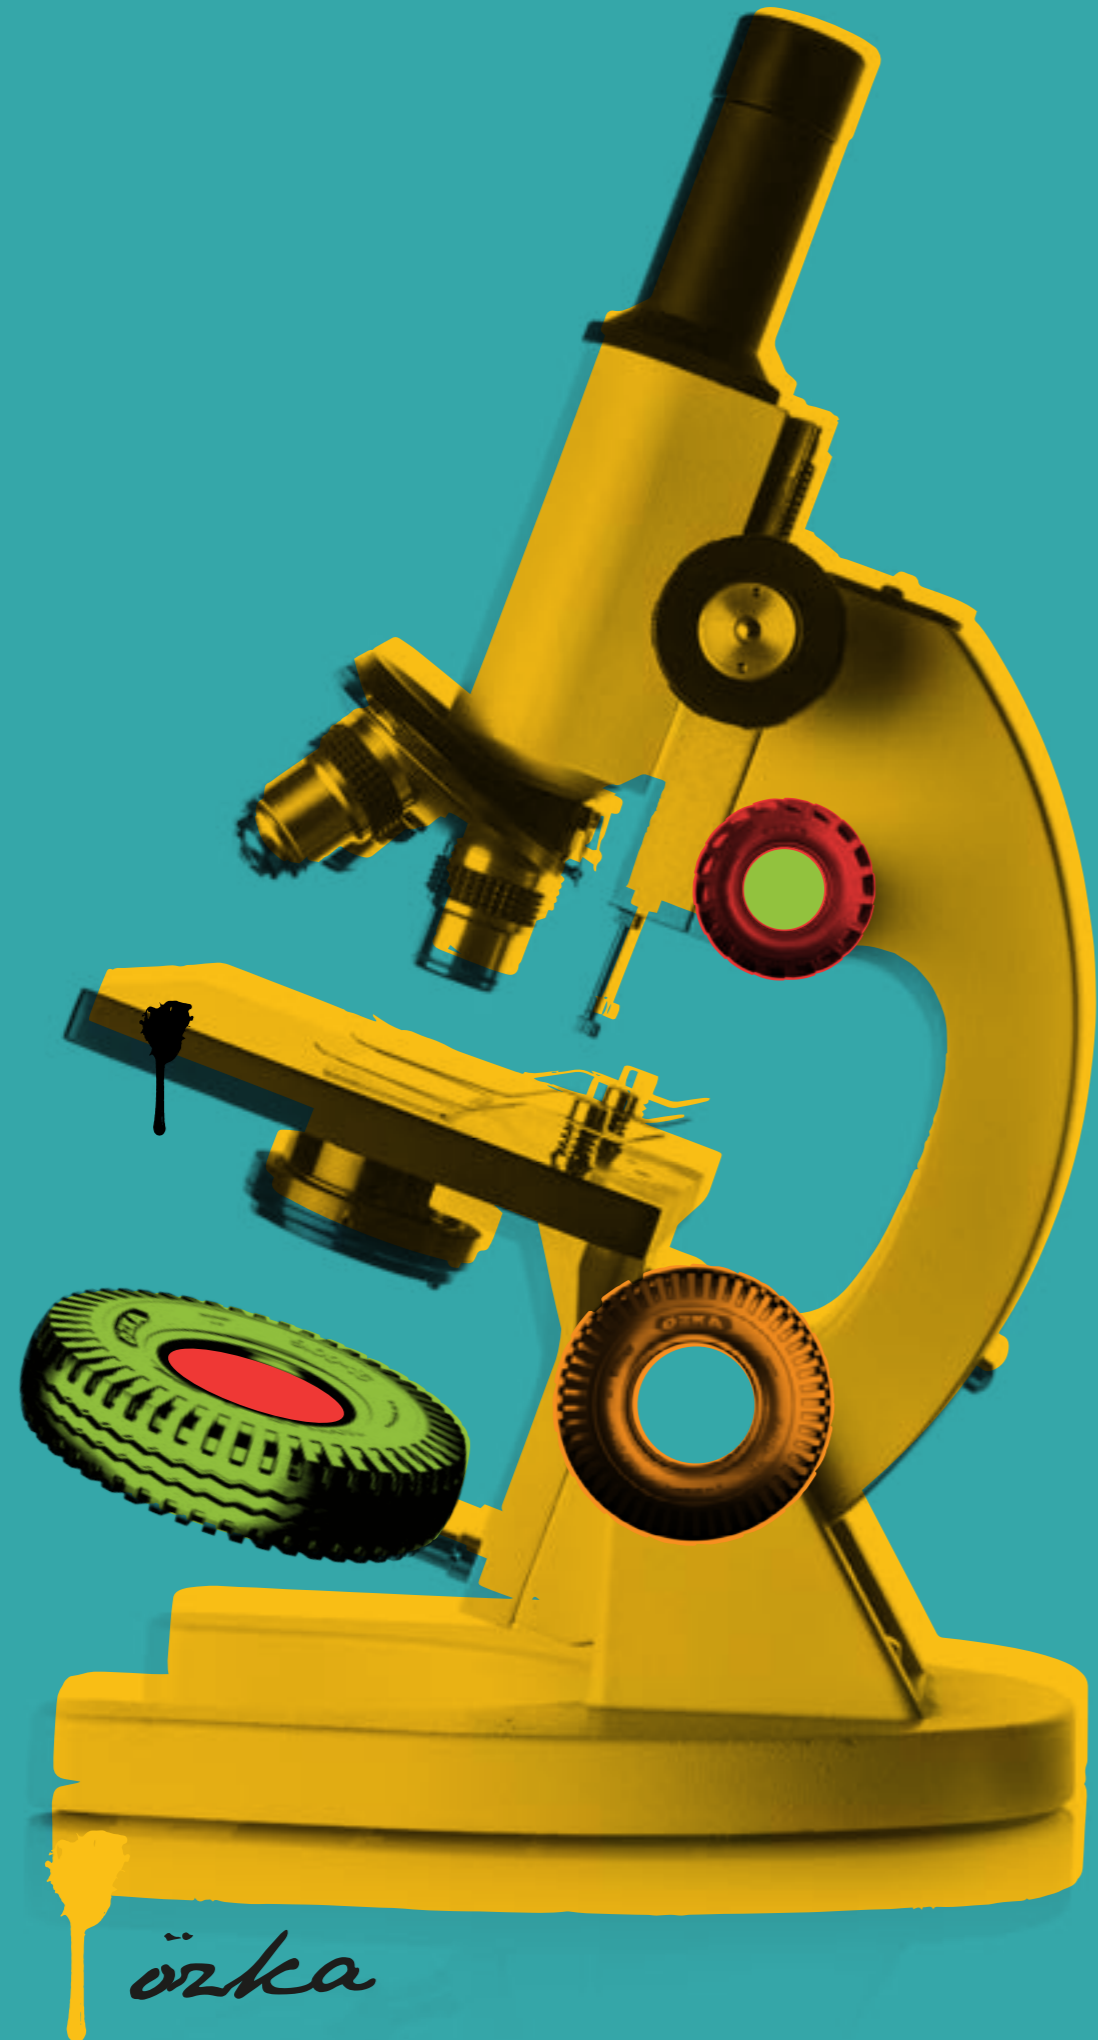

INNOVATION IS OUR TRADITION

WIDE RANGE OF HIGH-QUALITY TYRES
PRODUCED WITH EXPERTISE
AS A RESULT OF INNOVATIVE WORKS!

özka

ÖZKA




**FEEL THE POWER,
COMFORT &
TRACTION**

**EXPERIENCE OF EXCELLENT
PERFORMANCE AND LONG LASTING
SERVICE LIFE OF ÖZKA TYRES!**

ÖZKA

**READY,
STEADY,
GO!**

**CUSTOMER ORIENTED APPROACH!
ON TIME DELIVERY!
FAST SOLUTIONS!**

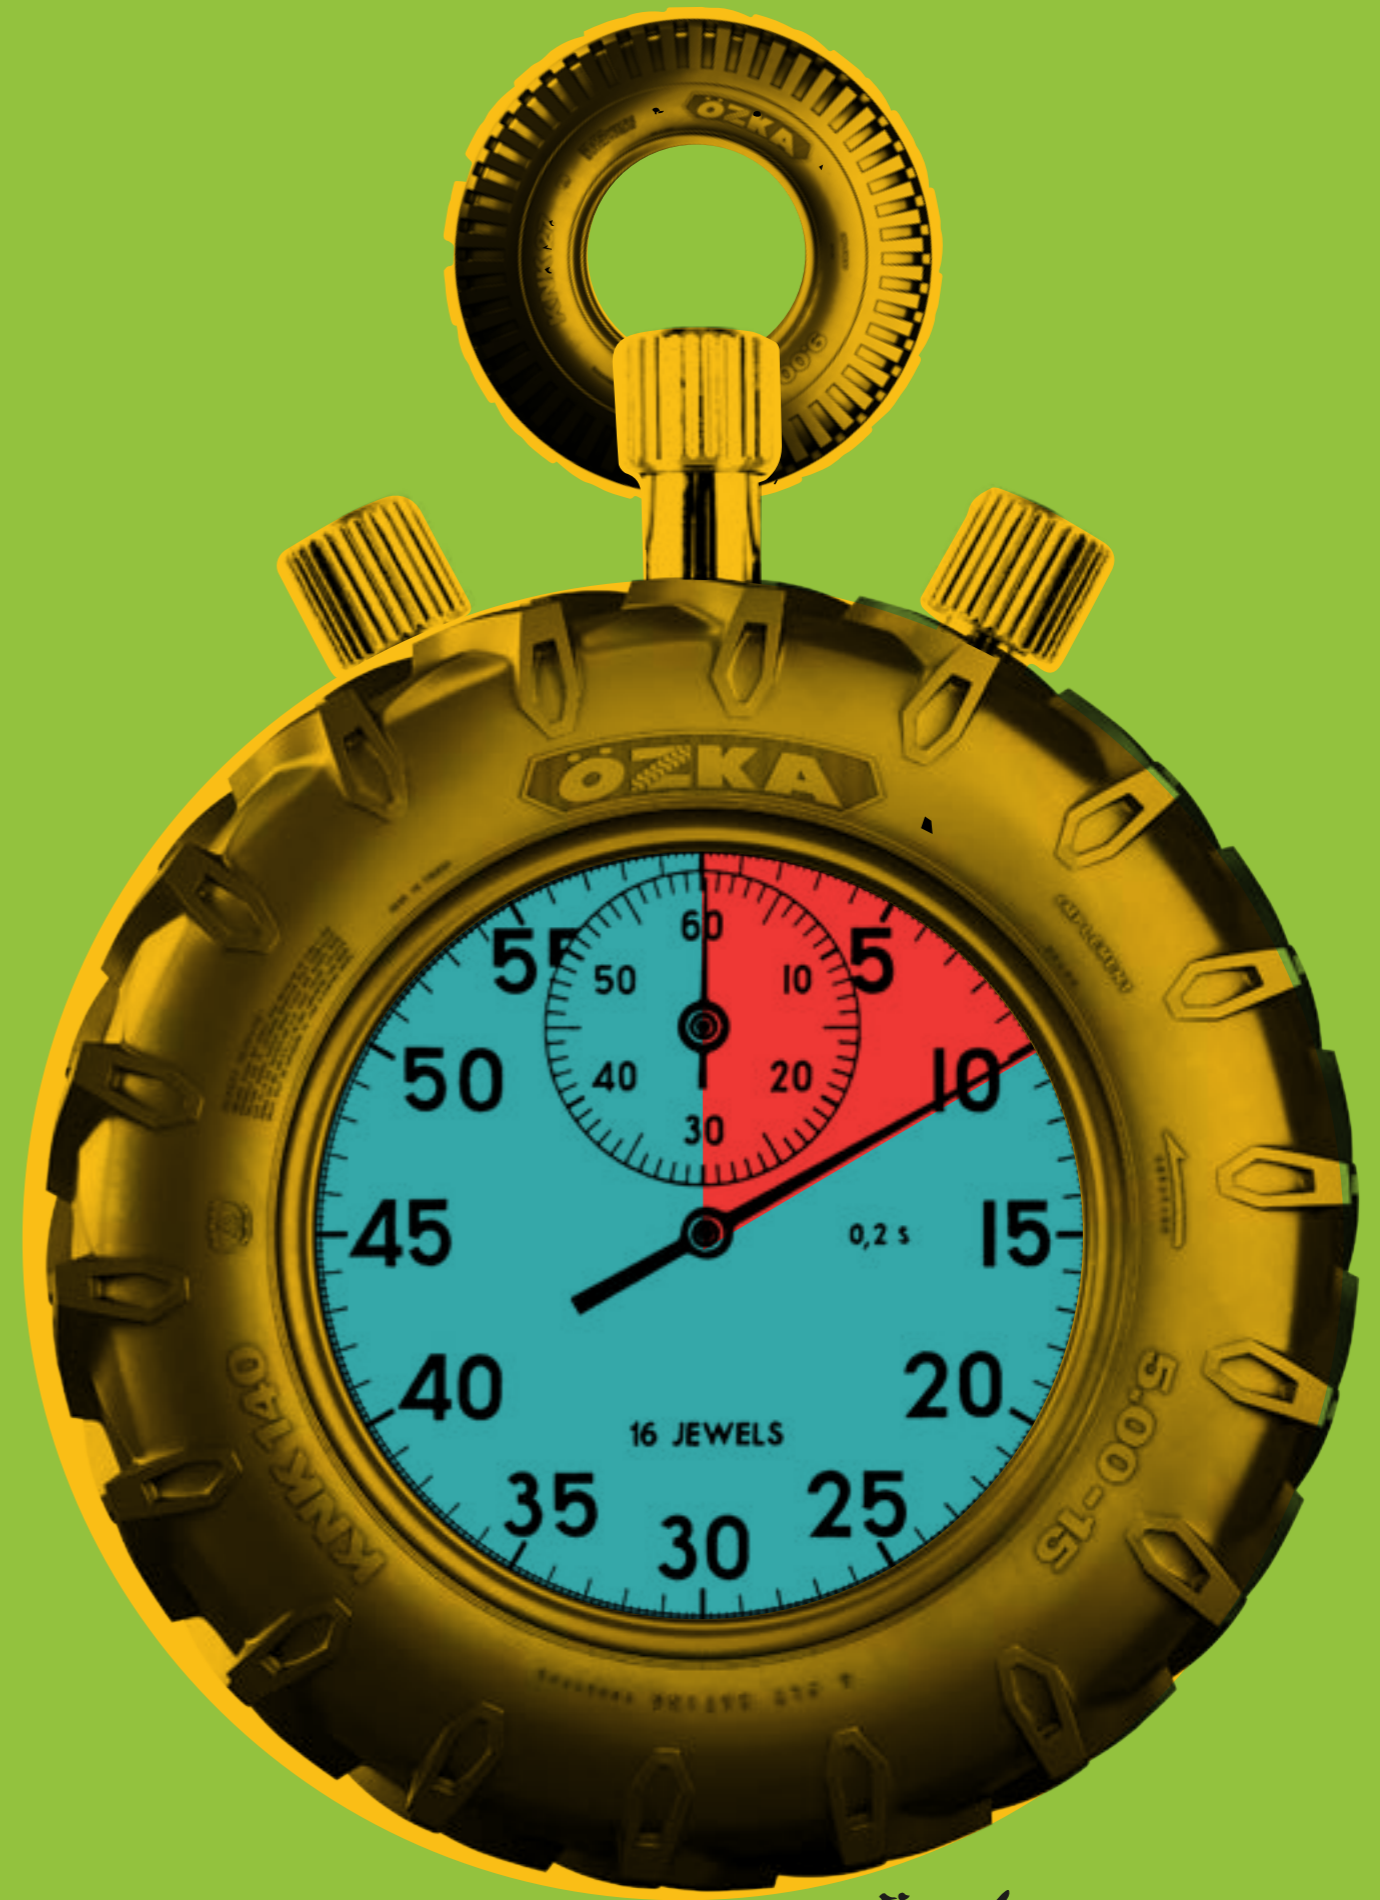

özka

EXPERTISE IN ANY DETAILS



özka



PRODUCT RANGE

RADIAL TRACTOR TYRES



AGR010 **AGR011**

FRONT TRACTOR TYRES



KNK30 **KNK32** **KNK33** **KNK35** **KNK50**

IMPLEMENT TYRES



KNK42 **KNK48** **KNK50** **KNK52** **KNK54** **KNK140**

FORESTRY TYRES



FRS40

REAR TRACTOR TYRES



KNK50 **KNK53**

IRRIGATION TYRES



KNK55

HARVESTER TYRES



KNK36 **KNK48** **KNK50**

RADIAL EM TYRES



OR71

EM / INDUSTRIAL TYRES



KNK44 **KNK65** **KNK66** **IND80** **IND85** **IND88**

FLOTATION TYRES



KNK22 **KNK25** **KNK26** **KNK27** **KNK28** **KNK42** **KNK46**

EM / INDUSTRIAL TYRES



KNK70 **KNK72** **KNK74**

COMPACTOR TYRES



KNK77 **KNK88**

FORKLIFT TYRES




KNK40

FLOTATION TYRES



KNK48 **KNK52** **KNK56**

LIGHT TRUCK & MINIBUS TYRES

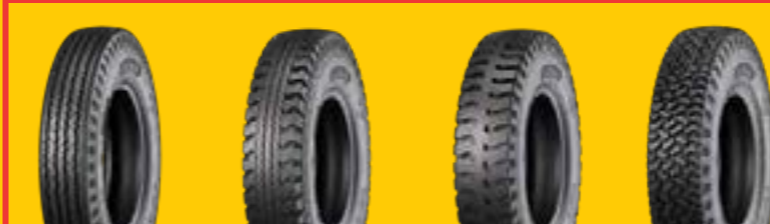

KNK20 **KNK24** **KNK25** **KNK126**

MILITARY TYRES



KNK10 **KNK12** **KNK14**

AGRICULTURAL TYRES

- | | | | |
|---------------|---------------|--------------|--------------|
| AGR010 | AGR011 | KNK30 | KNK32 |
| KNK33 | KNK35 | KNK50 | KNK53 |
| KNK55 | KNK36 | KNK48 | KNK26 |
| KNK27 | KNK22 | KNK25 | KNK28 |
| KNK42 | KNK52 | KNK56 | KNK46 |
| KNK54 | KNK140 | FRS40 | |



AGRO10

RADIAL TRACTOR TYRES

- Comfortable drive due to flexible sidewall structure
- Mud repellent feature with its specially designed tread pattern
- High performance due to deep treads and wide base track



65 SERIES

New Product Code	Product Code	Tyre Size	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	Psi		
R6524440102	R6524440	440/65 R24	TL	445	1185	128/131	D/A8	1800/1950	35	3542	535
R6524480102	R6524480	480/65 R24	TL	480	1235	133/136	D/A8	2060/2240	35	3683	555
R6524540102	R6524540	540/65 R24	TL	550	1320	146/149	D/A8	3000/3250	34	3924	589
R6526750102	R6526750	750/65 R26	TL	755	1640	166/163	A8/B	5300/4875	34	4844	722
R6528440102	R6528440	440/65 R28	TL	445	1285	131/134	D/A8	1950/2120	35	3857	585
R6528480102	R6528480	480/65 R28	TL	480	1337	142/145	D/A8	2650/2900	35	4004	606
R6528540102	R6528540	540/65 R28	TL	550	1420	149/152	D/A8	3250/3550	35	4238	639
R6528600102	R6528600	600/65 R28	TL	591	1491	154/157	D/A8	3750/4125	34	4439	668
R6530540102	R6530540	540/65 R30	TL	550	1470	150/153	D/A8	3350/3650	34	4396	664
R6532800102	R6532800	800/65 R32	TL	800	1858	178/175	A8/B	7500/6900	46	5509	824
R6534540102	R6534540	540/65 R34	TL	550	1575	152/155	D/A8	3550/3875	34	4725	716
R6538540102	R6538540	540/65 R38	TL	550	1675	153/156	D/A8	3650/4000	34	5039	767
R6534600102	R6534600	600/65 R34	TL	601	1644	160/157	D/A8	4515/4000	35	4920	744
R6538600102	R6538600	600/65 R38	TL	595	1750	159/162	D/A8	4375/4750	35	5251	797
R6538650102	R6538650	650/65 R38	TL	650	1820	163/166	D/A8	4875/5300	34	5449	825
R6542650102	R6542650	650/65 R42	TL	650	1913	165/168	D/A8	5150/5600	34	5744	872

70 SERIES

R7016240102	R7016240	240/70 R16	TL	245	745	104/104	A8/B	900/900	34	2234	339
R7016260102	R7016260	260/70 R16	TL	260	770	109/109	A8/B	1030/1030	34	2305	349
R7016280102	R7016280	280/70 R16	TL	282	798	112/112	A8/B	1120/1120	34	2384	360
R7018280102	R7018280	280/70 R18	TL	282	849	114/114	A8/B	1180/1180	34	2544	385
R7020260102	R7020260	260/70 R20	TL	260	875	113/113	A8/B	1150/1150	34	2634	401
R7020280102	R7020280	280/70 R20	TL	282	900	116/116	A8/B	1250/1250	34	2704	411
R7020300102	R7020300	300/70 R20	TL	295	952	120/117	A8/B	1400/1285	34	2851	432
R7020320102	R7020320	320/70 R20	TL	319	982	113/113	A8/B	1150/1150	23	2936	444
R7020360102	R7020360	360/70 R20	TL	357	1042	129/129	A8/B	1850/1850	34	3106	468
R7020380102	R7020380	380/70 R20	TL	380	1082	122/122	A8/B	1500/1500	23	3219	484
R7024320102	R7024320	320/70 R24	TL	319	1095	116/116	A8/B	1250/1250	23	3288	499
R7024360102	R7024360	360/70 R24	TL	357	1152	122/122	A8/B	1500/1500	23	3449	522
R7024380102	R7024380	380/70 R24	TL	380	1190	125/125	A8/B	1650/1650	23	3556	537
R7024420102	R7024420	420/70 R24	TL	418	1248	130/130	A8/B	1900/1900	23	3720	560
R7024460102	R7024460	460/70 R24	TL	460	1260	152/149	A8/B	3550/3250	46	3754	565
R7024480102	R7024480	480/70 R24	TL	480	1320	138/135	A8/B	2360/2180	23	3924	589
R7026480102	R7026480	480/70 R26	TL	480	1380	139/136	A8/B	2430/2240	23	4109	618
R7028360102	R7028360	360/70 R28	TL	357	1255	125/125	A8/B	1650/1650	23	3772	573
R7028380102	R7028380	380/70 R28	TL	380	1293	127/127	A8/B	1750/1750	23	3879	588
R7028420102	R7028420	420/70 R28	TL	418	1351	133/133	A8/B	2060/2060	23	4043	612
R7028480102	R7028480	480/70 R28	TL	480	1425	140/140	A8/B	2500/2500	23	4253	641
R7030420102	R7030420	420/70 R30	TL	418	1400	134/131	A8/B	2120/1950	23	4198	636
R7030480102	R7030480	480/70 R30	TL	480	1480	141/138	A8/B	2575/2360	23	4424	668
R7030600102	R7030600	600/70 R30	TL	595	1605	158/156	A8/B	4250/4000	34	4777	718
R7034480102	R7034480	480/70 R34	TL	479	1580	143/140	A8/B	2725/2500	23	4739	718
R7034520102	R7034520	520/70 R34	TL	516	1640	148/146	A8/B	3150/3000	23	4908	742
R7038480102	R7038480	480/70 R38	TL	480	1685	145/142	A8/B	2900/2650	23	5067	771
R7038520102	R7038520	520/70 R38	TL	516	1750	150/147	A8/B	3350/3075	23	5251	797
R7038580102	R7038580	580/70 R38	TL	580	1830	155/152	A8/B	3875/3550	23	5477	829
R7038710102	R7038710	710/70 R38	TL	720	1965	171/174	D/A8	6150/6700	34	5859	883
R7042710102	R7042710	710/70 R42	TL	720	2061	173/176	D/A8	6500/7100	34	6162	931

80 SERIES	New Product Code	Product Code	Tyre Size	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	R8042480102	R8042480	480/80 R42	TL	485	1845	151/148	A8/B	3450/3150	23	5552	845
	R8046480102	R8046480	480/80 R46	TL	485	1945	164/164	A8/B	5000/5000	46	5866	895
85 SERIES	R8520280102	R8520280	280/85 R20	TL	282	984	112/109	A8/B	1120/1030	23	2942	444
	R8520320102	R8520320	320/85 R20	TL	319	1052	119/116	A8/B	1360/1250	23	3134	472
	R8524250102	R8524250	250/85 R24	TL	251	1036	109/109	A8/B	1030	23	3121	475
	R8524280102	R8524280	280/85 R24	TL	282	1086	115/112	A8/B	1215/1120	23	3262	495
	R8524320102	R8524320	320/85 R24	TL	319	1154	122/119	A8/B	1500/1360	23	3454	523
	R8524340102	R8524340	340/85 R24	TL	343	1188	125/122	A8/B	1650/1500	23	3551	536
	R8524380102	R8524380	380/85 R24	TL	380	1256	131/128	A8/B	1950/1800	23	3743	563
	R8524420102	R8524420	420/85 R24	TL	418	1324	137/134	A8/B	2300/2060	23	3935	591
	R8528250102	R8528250	250/85 R28	TL	251	1137	112/112	A8/B	1120	23	3406	516
	R8528280102	R8528280	280/85 R28	TL	282	1187	118/115	A8/B	1320/1215	23	3580	546
	R8528320102	R8528320	320/85 R28	TL	320	1255	124/121	A8/B	1600/1450	23	3772	573
	R8528340102	R8528340	340/85 R28	TL	343	1289	127/124	A8/B	1750/1600	23	3868	587
	R8528380102	R8528380	380/85 R28	TL	380	1357	133/130	A8/B	2060/1900	23	4060	614
	R8528420102	R8528420	420/85 R28	TL	418	1425	139/136	A8/B	2430/2240	23	4253	641
	R8530380102	R8530380	380/85 R30	TL	380	1408	135/132	A8/B	2180/2000	23	4220	639
	R8530420102	R8530420	420/85 R30	TL	418	1476	140/137	A8/B	2500/2300	23	4413	667
	R8530460102	R8530460	460/85 R30	TL	455	1544	145/142	A8/B	2900/2650	23	4605	694
	R8532320102	R8532320	320/85 R32	TL	320	1365	126/126	A8/B	1700/1700	34	4115	627
	R8534420102	R8534420	420/85 R34	TL	418	1578	142/139	A8/B	2650/2430	23	4733	718
	R8534460102	R8534460	460/85 R 34	TL	455	1646	147/144	A8/B	3075/2800	23	4925	745
	R8536320102	R8536320	320/85 R36	TL	320	1465	128/125	A8/B	1800/1650	23	4429	677
	R8536340102	R8536340	340/85 R36	TL	343	1495	132/129	A8/B	2000/1850	23	4514	689
	R8538320102	R8538320	320/85 R38	TL	320	1515	143/143	A8/B	2725/2725	52	4587	703
	R8538340102	R8538340	340/85 R38	TL	343	1545	133/130	A8/B	2060/1900	23	4672	715
	R8538380102	R8538380	380/85 R38	TL	380	1611	139/136	A8/B	2430/2240	23	4858	741
	R8538420102	R8538420	420/85 R38	TL	418	1679	144/141	A8/B	2800/2575	23	5050	768
R8538460102	R8538460	460/85 R38	TL	455	1747	149/146	A8/B	3250/3000	23	5243	795	
R8538520102	R8538520	520/85 R38	TL	516	1849	155/152	A8/B	3875/3550	23	5531	836	
R8538650102	R8538650	650/85 R38	TL	650	2071	173/176	D/A8	6500/7100	34	6159	925	
R8542520102	R8542520	520/85 R42	TL	516	1955	157/157	A8/B	4125/4125	23	5863	889	
R8546340102	R8546340	340/85 R46	TL	345	1756	150/151	D/A8	3350/3450	52	5332	819	
R8548340102	R8548340	340/85 R48	TL	343	1800	151/152	D/A8	3450/3550	58	5472	842	
90 SERIES	R9046320102	R9046320	320/90 R46	TL	320	1750	146/146	A8/B	3000/3000	46	5315	817
	R9046380102	R9046380	380/90 R46	TL	380	1860	159/162	D/A8	4375/4750	58	5626	861
	R9050320102	R9050320	320/90 R50	TL	320	1850	150/150	A8/B	3350/3350	52	5630	867
	R9054320102	R9054320	320/90 R54	TL	320	1950	155/155	A8/B	3875/3875	58	5944	917
95 SERIES	R0020095102	R9520	9,5 R20	TL	241	938	108/105	A8/B	1000/925	23	2812	426
	R9532210102	R9532210	210/95 R32	TL	215	1215	114/114	A8/B	1180/1180	34	3691	567
	R9532230102	R9532230	230/95 R32	TL	230	1255	128/128	A8/B	1800/1800	58	3804	583
	R9532270102	R9532270	270/95 R32	TL	275	1330	136/136	A8/B	2240/2240	58	4016	613
	R9536210102	R9536210	210/95 R36	TL	215	1320	118/118	A8/B	1320/1320	34	4019	619
	R9536230102	R9536230	230/95 R36	TL	230	1355	130/130	A8/B	1900/1900	58	4118	633
	R9536270102	R9536270	270/95 R36	TL	275	1435	139/139	A8/B	2430/2430	58	4345	665
	R9538270102	R9538270	270/95 R38	TL	275	1485	140/140	A8/B	2500/2500	58	4502	691
	R9542230102	R9542230	230/95 R42	TL	230	1505	133/136	D/A8	2060/2240	58	4590	709
	R9544210102	R9544210	210/95 R44	TL	215	1520	120/120	A8/B	1400/1400	34	4649	720
	R9544230102	R9544230	230/95 R44	TL	230	1560	132/132	A8/B	2000/2000	58	4762	736
	R9544270102	R9544270	270/95 R44	TL	275	1635	142/142	A8/B	2650/2650	58	4974	766
	R9546270102	R9546270	270/95 R46	TL	275	1685	143/143	A8/B	2725/2725	58	5131	791
	R9546300102	R9546300	300/95 R46	TL	300	1740	148/148	A8/B	3150/3150	58	5287	813
	R9548230102	R9548230	230/95 R48	TL	230	1660	136/136	A8/B	2240/2240	58	5077	786
	R9548270102	R9548270	270/95 R48	TL	275	1735	144/144	A8/B	2800/2800	58	5289	816
R9552300102	R9552300	300/95 R52	TL	300	1900	156/159	D/A8	4000/4375	58	5787	892	
R9554270102	R9554270	270/95 R54	TL	275	1885	146/146	A8/B	3000/3000	58	5761	891	



AGRO11

RADIAL TRACTOR TYRES

- Comfortable drive due to flexible sidewall structure
- Mud repellent feature with its specially designed tread pattern
- High performance due to deep treads and wide base track

70 SERIES	New Product Code	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	R7042620112	R704262011	620/70 R42	TL	625	1935	166/166	A8/B	5300/5300	46	5806	881
75 SERIES	R7526620112	R752662011	620/75 R26	TL	630	1600	166/166	A8/B	5300/5300	46	4731	706
	R7530620112	R753062011	620/75 R30	TL	630	1695	163/161	A8/B	4875/4625	35	5032	754
	R7532650112	R753265011	650/75 R32	TL	650	1795	172/172	A8/B	6300/6300	46	5331	799



**EXPERIENCE
YOU NEED.
RESULTS
YOU TARGET.**

**THE RIGHT CHOICE FOR EXPERTS WHO
WANT TO REACH THE TARGET!**



KNK30

FRONT TRACTOR TYRES

- Tractor front tyre for general use
- Resistance to stone and impacts thanks to strong and robust body
- Smooth driving with gutters at central back
- Prevention of skidding thanks to treads in shoulders
- Long lasting and economic use
- Excellent performance in highway and land

KNK30	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	3162011	3102	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
	3162021	3103	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
	3163011	3202	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
	3163021	3203	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
	3164011	3402	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
	3164021	3403	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363



KNK32

FRONT TRACTOR TYRES

- Long lasting front tractor tyre
- High maneuverability thanks to nondirectional use feature
- Resistant structure against punctures thanks to increased tread depth

KNK32	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	3164111	3412	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
	3164121	3413	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
	3181021	3513	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390
	3201021	3553	6.50-20 8PR	TT	175	865	102	A6	850	54	2605	397
	3202021	3603	7.50-20 8PR	TT	205	915	108	A6	1000	49	2747	417



KNK33

FRONT TRACTOR TYRES

- Extra strong with its increased tread depth
- Comfortable driving in the field and on the road by pattern design
- Mud-free pattern

KNK33

New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	Psi		
3162111	3132	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
3162121	3133	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
3163111	3232	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
3163121	3233	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
3164211	3472	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
3164221	3473	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
3191011	3542	6.00-19 6PR	TT	165	814	93	A6	650	48	2453	374



KNK35

FRONT TRACTOR TYRES

- Suitable to asphalt and land usage
- Excellent maneuverability and nondirectional use
- Resistant structure against punctures
- Straight movement stability in soft land

KNK35

New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	Psi		
3161011	3052	5.50-16 6PR	TT	150	710	86	A6	530	54	2135	325
3162211	3112	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
3162221	3113	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
3163211	3212	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
3163221	3213	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
3164311	3432	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
3164321	3433	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
3166021	3463	9.00-16 8PR	TT	234	855	111	A6	1090	45	2545	383
3167021	3483	10.00-16 8PR	TT	274	895	115	A6	1215	41	2658	399
3168021	3493	11.00-16 8PR	TT	315	965	118	A6	1320	36	2856	427
3181221	3503	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390



KNK50

FRONT TRACTOR TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK50

	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	3151021	3003	7.50-15 8PR	TT	205	780	99	A6	775	52	2325	350
	3162311	3122	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
	3162321	3123	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
	3163311	3222	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
	3163321	3223	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
	3164421	3423	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
	3181421	3523	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390
	3202121	3623	7.50-20 8PR	TT	205	915	108	A6	1000	49	2747	417
	3203011	3652	9.5-20 6PR	TT	241	940	101	A6	825	30	2818	427
	3203021	3653	9.5-20 8PR	TT	241	940	106	A6	950	35	2817	427
	3203022	3663	9.5-20 8PR	TL	241	940	106	A6	950	35	2817	427
	3204021	3673	11.2-20 8PR	TT	285	1005	113	A6	1150	38	3001	453
	3204022	3683	11.2-20 8PR	TL	285	1005	113	A6	1150	38	3001	453



KNK50

REAR TRACTOR TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK50

New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	Psi		
5241011	5002	8,3-24 6PR	TT	210	1009	105	A6	925	30	3044	465
5241021	5003	8,3-24 8PR	TT	210	1009	108	A6	1000	35	3044	465
5242011	5102	9,50-24 6PR	TT	241	1050	110	A6	1060	26	3160	481
5242021	5103	9,50-24 8PR	TT	241	1050	116	A6	1250	34	3160	481
5243011	5112	11,2-24 6PR	TT	284	1105	110	A6	1060	26	3316	503
5243021	5113	11,2-24 8PR	TT	284	1105	116	A6	1250	34	3316	503
5243041	5115	11,2-24 12PR	TT	284	1105	122	A6	1500	40	3316	503
5244011	5122	12,4-24 6PR	TT	315	1160	115	A6	1215	24	3471	525
5244021	5123	12,4-24 8PR	TT	315	1160	118	A6	1320	29	3471	525
5244121	5123M	320/85-24 8PR	TT	315	1160	118	A6	1320	29	3471	525
5244041	5125	12,4-24 12PR	TT	315	1160	124	A6	1600	35	3471	525
5244141	5125M	320/85-24 12PR	TT	315	1160	124	A6	1600	35	3471	525
5245011	5132	13,6-24 6PR	TT	345	1210	120	A6	1400	22	3613	545
5245021	5133	13,6-24 8PR	TT	345	1210	123	A6	1550	28	3613	545
5245041	5135	13,6-24 12PR	TT	345	1210	129	A6	1850	34	3613	545
5246011	5142	14,9-24 6PR	TT	378	1265	125	A6	1650	20	3768	567
5246021	5143	14,9-24 8PR	TT	378	1265	128	A6	1800	26	3768	567
5246121	5143M	380/85-24 8PR	TT	378	1265	128	A6	1800	26	3768	567
5246031	5144	14,9-24 10PR	TT	378	1265	131	A6	1950	30	3768	567
5246132	5144M	380/85-24 10PR	TT	378	1265	131	A6	1950	30	3768	567
5246051	5146	14,9-24 14PR	TT	378	1265	137	A6	2300	38	3768	567
5248021	5053	16,9-24 8PR	TT	429	1335	133	A6	2060	25	3966	595
5248031	5054	16,9-24 10PR	TT	429	1335	136	A6	2240	29	3966	595
5248051	5056	16,9-24 14PR	TT	429	1335	141	A6	2575	35	3966	595
5247042	5195	15,5/80-24 12PR	TL	394	1260	157	A6	4125	44	3754	565
5247062	5197	15,5/80-24 16PR	TL	394	1260	163	A6	4875	58	3754	565
5261031	5184	14,9-26 10PR	TT	378	1315	133	A6	2060	30	3926	592
5262031	5154	18,4-26 10PR	TT	467	1461	142	A6	2650	26	4338	650
5262061	5157	18,4-26 16PR	TT	467	1461	153	A6	3650	44	4338	650
5261051	5186	14,9-26 14PR	TT	378	1315	140	A6	2500	39	3926	592
5281011	5202	11,2-28 6PR	TT	284	1205	112	A6	1120	26	3630	553
5281021	5203	11,2-28 8PR	TT	284	1205	118	A6	1320	34	3630	553
5282011	5212	12,4-28 6PR	TT	315	1260	117	A6	1285	25	3786	575
5282021	5213	12,4-28 8PR	TT	315	1260	125	A6	1650	30	3786	575
5282221	5213M	320/85-28 8PR	TT	315	1260	125	A6	1650	30	3786	575
5283011	5222	13,6-28 6PR	TT	345	1310	121	A6	1450	23	3927	595
5283021	5223	13,6-28 8PR	TT	345	1310	125	A6	1650	29	3927	595



KNK50

REAR TRACTOR TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK50

New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	Psi		
5284011	5232	14.9-28 6PR	TT	378	1365	125	A6	1650	20	4083	617
5284021	5233	14.9-28 8PR	TT	378	1365	130	A6	1900	26	4083	617
5284051	5236	14.9-28 14PR	TT	378	1365	143	A6	2725	40	4083	617
5285021	5253	16.9-28 8PR	TT	429	1435	135	A6	2180	24	4281	645
5285031	5254	16.9-28 10PR	TT	429	1435	139	A6	2430	29	4281	645
5285051	5256	16.9-28 14PR	TT	429	1435	143	A6	2725	34	4281	645
5301021	5303	14.9-30 8PR	TT	378	1415	132	A6	2000	26	4240	642
5301031	5304	14.9-30 10PR	TT	378	1415	136	A6	2240	29	4240	642
5302021	5313	16.9-30 8PR	TT	429	1485	137	A6	2300	25	4438	670
5302031	5314	16.9-30 10PR	TT	429	1485	144	A6	2800	28	4438	670
5302051	5316	16.9-30 14PR	TT	429	1485	150	A6	3350	34	4438	670
5302151	5316M	420/85-30 14PR	TT	429	1485	150	A6	3350	34	4438	670
5303021	5323	18.4-30 8PR	TT	467	1550	139	A6	2430	20	4622	696
5303121	5323M	460/85-30 8PR	TT	467	1550	139	A6	2430	20	4622	696
5303031	5324	18.4-30 10PR	TT	467	1550	145	A6	2900	26	4622	696
5303131	5324M	460/85-30 10PR	TT	467	1550	145	A6	2900	26	4622	696
5303051	5326	18.4-30 14PR	TT	467	1550	154	A6	3750	40	4622	696
5303151	5326M	460/85-30 14PR	TT	467	1550	154	A6	3750	40	4622	696
5321021	5413	8,3-32 8PR	TT	211	1195	111	A6	1090	46	3634	559
5322021	5423	9,5-32 8PR	TT	241	1250	115	A6	1215	39	3790	581
5323021	5433	12,4-32 8PR	TT	315	1360	125	A6	1650	32	4101	625
5341031	5514	16.9-34 10PR	TT	429	1585	142	A6	2650	29	4753	720
5341131	5514M	420/85-34 10PR	TT	429	1585	142	A6	2650	29	4753	720
5341051	5516	16.9-34 14PR	TT	429	1585	148	A6	3150	37	4753	720
5341151	5516M	420/85-34 14PR	TT	429	1585	148	A6	3150	37	4753	720
5342031	5524	18.4-34 10PR	TT	467	1650	146	A6	3000	26	4937	746
5342131	5524M	460/85-34 10PR	TT	467	1650	146	A6	3000	26	4937	746
5342051	5526	18.4-34 14PR	TT	467	1650	155	A6	3875	40	4937	746
5361011	5602	12,4-36 6PR	TT	315	1465	121	A6	1450	24	4429	677
5361021	5603	12,4-36 8PR	TT	315	1465	126	A6	1700	29	4429	677
5362011	5612	13,6-36 6PR	TT	345	1515	125	A6	1650	23	4571	697
5362021	5613	13,6-36 8PR	TT	345	1515	129	A6	1850	29	4571	697
5381021	5643	12,4-38 8PR	TT	315	1515	127	A6	1750	29	4587	703
5382021	5703	13,6-38 8PR	TT	345	1565	131	A6	1950	29	4728	723
5382031	5704	13,6-38 10PR	TT	345	1565	135	A6	2180	33	4728	723
5383021	5713	14,00-38 8PR	TT	345	1565	131	A6	1950	29	4728	723
5383031	5714	14,00-38 10PR	TT	345	1565	135	A6	2180	33	4728	723
5384031	5724	15,5-38 10PR	TT	394	1570	138	A6	2360	33	4742	725
5384041	5725	15,5-38 12PR	TT	394	1570	141	A6	2575	38	4742	725
5385031	5734	16,9-38 10PR	TT	429	1685	145	A6	2900	30	5067	771
5385051	5736	16,9-38 14PR	TT	429	1685	152	A6	3550	40	5067	771
5386031	5744	18,4-38 10PR	TT	467	1750	147	A6	3075	26	5251	797
5386051	5746	18,4-38 14PR	TT	467	1750	154	A6	3750	36	5251	797



KNK53

REAR TRACTOR TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK53	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	5302221	5333K	16.9-30 8PR	TT	429	1485	137	A6	2300	25	4438	670
	5302231	5334K	16.9-30 10PR	TT	429	1485	144	A6	2800	28	4438	670
	5302241	5335K	16.9-30 12PR	TT	429	1485	147	A6	3075	31	4438	670
	5302251	5336K	16.9-30 14PR	TT	429	1485	150	A6	3350	34	4438	670
	5384141	5755K	15,5-38 12PR	TT	394	1570	141	A6	2575	38	4742	725
	5385131	5764K	16,9-38 10PR	TT	429	1685	145	A6	2900	30	5067	771



KNK55

IRRIGATION TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK55

New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	Psi		
5243111	5022	11.2-24 6PR	TT	284	1105	110	A6	1060	26	3316	503
5243121	5023	11.2-24 8PR	TT	284	1105	116	A6	1250	34	3316	503
5246212	5162	14.9-24 6PR	TL	378	1265	123	A6	1550	20	3768	567
5246211	5167	14.9-24 6PR	TT	378	1265	123	A6	1550	20	3768	567
5246221	5168	14.9-24 8PR	TT	378	1265	127	A6	1750	26	3768	567
5380911	5632	11.2-38 6PR	TT	284	1450	117	A6	1285	19	4403	677
5380921	5633	11.2-38 8PR	TT	284	1450	122	A6	1500	26	4403	677



KNK36

HARVESTER TYRES

- Easy rolling resistance with five-rib design
- Suitable for both on and off road application
- Designed for field / road transport and soil tillage operations with implement machinery and trailers
- Good flotation properties with a high load capacity at low tire pressure

KNK36

New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	Psi		
4242032	4904	9.00-24 10PR	TL	272	1094	124	B	1600	40	3285	499
4203052	4746	16.0-70.20 14PR	TL	418	1075	154	A6	3750	51	3099	438



KNK48

HARVESTER TYRES

- Highway, agricultural and off-road tyre with high load bearing capacity and low section
- Minimum ground holding feature thanks to wide circumference channels
- Moving forward easily without submerging thanks to its wide tread pattern
- Resistant structure against punctures thanks to increased tread depth

KNK48

New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	Psi		
4181041	4605	10.5/80-18 12PR	TT	274	885	135/123	A8	2180	65	2646	400
4182051	4626	12.5/80-18 14PR	TT	308	965	144/131	A8	2800	63	2872	432
4183061	4647	13.0/65-18 16PR	TT	336	890	144/131	A8	2800	71	2660	402



KNK50

HARVESTER TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK50

New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	Psi		
5263072	5178	23.1-26 18PR	TL	587	1605	162	A6	4750	37	4746	708
6302061	6737	18.4-30 16PR	TT	467	1550	158	A6	4250	45	4622	696
6302161	6737M	460/85-30 16PR	TT	467	1550	158	A6	4250	45	4622	696
5304072	5358	23.1-30 18PR	TL	587	1715	160	A6	4500	36	5088	762
5342061	5527	18.4-34 16PR	TT	467	1650	159	A6	4375	45	4937	746
5387061	5757	20.8-38 16PR	TT	528	1840	162	A6	4750	39	5506	833
5387062	5767	20.8-38 16PR	TL	528	1840	162	A6	4750	39	5506	833



KNK22

FLOTATION TYRES

- Resistant to stone and impacts thanks to its improved base
- General purposed trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction

KNK22	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	4202051	4716	9.00-20 14PR	TT	247	1017	133	A6	2060	81	3035	458



KNK25

FLOTATION TYRES

- Resistance to stone and impacts thanks to its improved base
- General purpose trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction

KNK25	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	4161041	4425	7.50-16 12PR	TT	214	787	121	A8	1450	72	2353	355
	4201051	4706	8.25-20 14PR	TT	234	970	133	A6	2060	90	2902	439



KNK26

FLOTATION TYRES

- Resistant to stone and impacts thanks to its improved base
- General purposed trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction

KNK26	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	4162041	4515	9.00-16 12PR	TT	247	865	125	A6	1650	58	2573	387
	4162051	4516	9.00-16 14PR	TT	247	865	128	A6	1800	67	2573	387



KNK27

FLOTATION TYRES

- Balanced driving and excellent traction thanks to its special design
- Increased water and mud discharge thanks to surrounded gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature

KNK27	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	4162141	4505	9.00-16 12PR	TT	247	865	125	A6	1650	58	2573	387
	4162151	4506	9.00-16 14PR	TT	247	865	128	A6	1800	67	2573	387



KNK28

FLOTATION TYRES

- Convenient to use in asphalt and land thanks to back pattern
- Durable side wall with strong structure
- Soil holding feature with complex tread structure and channels
- Providing straight location to the ground thanks to back design

KNK28	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	4161141	4445	7.50-16 12PR	TT	214	787	121	A8	1450	72	2353	355



KNK42

FLOTATION TYRES

- High load bearing capacity with strong structure and less soil compression with its wide base
- Anti-ground tread design

KNK42	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	4153442	4215	260/70-15.3 (10.0/75-15.3) 12PR	TL	268	753	126	A8	1700	52	2251	340
	4153552	4236	300/80-15.3 (11.5/80-15.3) 14PR	TL	295	869	141	A8	2575	58	2579	386
	4153052	4256	12.5/80-15.3 14PR	TL	307	889	142	A8	2650	62	2636	394



KNK46

FLOTATION TYRES

- Soil tillage, transport and hay harvesting applications with implement machinery, trailers and hay harvesters/balers
- The special tread compound resulting in exceptional cut and strong tread along with excellent wear resistance on all types of terrains

KNK46	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	4173052	4566	500/50-17 14PR	TL	503	932	149	A8	3250	41	2771	416
	4173072	4568	500/50-17 18PR	TL	503	932	157	A8	4125	70	2771	416



KNK48

FLOTATION TYRES

- Highway, agricultural and off-road tyre with high load bearing capacity and low section
- Minimum ground holding feature thanks to wide circumference channels
- Moving forward easily without submerging thanks to its wide tread pattern
- Resistant structure against punctures thanks to increased tread depth

KNK48	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	4151042	4365	10.0/75-15.3 (260/70-15.3) 12PR	TL	264	760	126	A8	1700	68	2271	343
	4151052	4366	10.0/75-15.3 (260/70-15.3) 14PR	TL	264	760	130	A8	1900	80	2271	343
	4152052	4376	11.5/80-15.3 (300/80-15.3) 14PR	TL	290	845	139	A8	2430	69	2511	377
	4153152	4386	12.5/80-15.3 (320/80-15.3) 14PR	TL	307	889	142	A8	2650	62	2636	394
	4163041	4525	10.5/65-16 (265/65-16) 12PR	TT	274	755	126	A8	1700	65	2262	343



KNK52

FLOTATION TYRES

- High load bearing capacity with low section off-road and agricultural tyre
- Holding features for dry and wet grounds thanks to its pattern

KNK52	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	4151142	4335	10.0/75-15.3 12PR	TL	264	760	126	A8	1700	68	2271	343
	4152152	4346	11.5/80-15.3 14PR	TL	290	845	139	A8	2430	69	2511	377
	4153252	4356	12.5/80-15.3 14PR	TL	307	889	142	A8	2650	62	2636	394



KNK56

FLOTATION TYRES

- Extra strong against stretching thanks to strong frame structure
- Flexibility and deep tread profile

KNK56	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	4153362	4397	12.5/80-15.3 16PR	TL	307	889	144	A8	2800	71	2636	394
	4153672	4418	400/60-15.5 18PR	TL	404	874	151	A8	3450	90	2595	389
	4221062	4847	550/60-22.5 16PR	TL	543	1244	154	A8	3750	41	3697	555



KNK42

IMPLEMENT TYRES

- Low rolling resistance
- High comfort
- Preventing skidding thanks to its special pattern
- Low soil compact feature thanks to its wide base

KNK42	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	1124032	1774	10.0/80-12 10PR	TL	261	671	116	A8	1250	57	1993	299



KNK48

IMPLEMENT TYRES

- High tread depth
- Low rolling resistance
- High comfort
- Low soil compact feature thanks to its wide base

KNK48	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	1124132	1764	10.0/80-12 10PR	TL	264	710	116	A8	1250	57	2103	314



KNK50

IMPLEMENT TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK50	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	1152011	1812	6.50/80-15 6PR	TT	163	663	96	A6	710	52	1994	303



KNK52

IMPLEMENT TYRES

- High load bearing capacity with low section off-road and agricultural tyre
- Holding features for dry and wet grounds thanks to its pattern

KNK52	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	1101001	1501	4,50-10 4PR	TT	124	490	49	A6	185	30	1465	221
	1121001	1611	5,00-12 4PR	TT	145	580	62	A6	265	32	1736	262
	1123011	1732	7,00-12 6PR	TT	200	683	83	A6	487	36	2027	304
	1131011	1752	6.50/80-13 6PR	TT	170	640	82	A6	475	52	1913	289



KNK54

IMPLEMENT TYRES

- High traction ability thanks to its angle blocks
- Easy movement ability thanks to anti-ground base design
- Preventing clusters in the center and sidewalls during movement of tractor thanks to its open design in center
- Facilitating releasing of muds thanks to windowed blocks

KNK54

New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	Psi		
1122011	1702	6.50/80-12 6PR	TT	163	588	80	A6	450	52	1758	266



KNK140

IMPLEMENT TYRES

- Proper use in lands and gardens
- Strong and robust structure
- Preventing skidding thanks to its special pattern
- Long lasting and economic use
- Optimum performance with small-type gardening and agriculture vehicles

KNK140

New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	Psi		
1151011	1802	5.00-15 6PR	TT	145	655	76	A6	400	50	1972	300



FRS40

FORESTRY TYRES

- Specially designed for forestry application
- Special tread and sidewall compound provides maximum tire life against cut and crack resistance
- Excellent puncture resistance thanks to strong breaker construction shoulder to shoulder,
- Lower lug angle providing excellent grip and self cleaning properties for logging operations
- Tie-bar on the central lugs protects the tire against deep impacts.

FRS40	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	526226	5507	18.4-26 16PR	TL	467	1461	153	A6	3650	44	4338	650

**OBSERVE.
ANALYSE.
TAKE ACTION.**

**QUICK ACTION PLANS BASED
ON ACCURATE OBSERVATIONS OF
A GREAT TEAM!**



örka

INDUSTRIAL EM, OTR TYRES

OR71 KNK44 KNK65 KNK66

IND80 IND85 IND88

KNK70 KNK72 KNK74

KNK77 KNK88 KNK40





OR71

RADIAL EM TYRES

- High traction and comfort
- Longer service life
- Comfortable drive due to flexible sidewall structure
- Strong carcass structure
- Resistance to fatigue due to wide shoulder and blocks
- Strong tread compound for cut-resistance
- High performance due to wide base track
- Mud repellent feature due to specially designed tread pattern

OR71	New Product Code	Product Code	Tyre Size	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			mm	mm		
	R7024460712	R702446071	460/70 R24	TL	455	1255	159/159	A8/B	4375/4375	58	3740	563
	R8024440102	R8024440	440/80 R24	TL	450	1320	154/154	A8/B	3750/3750	46	3924	589
	R8028440102	R8028440	440/80 R28	TL	450	1420	156/156	A8/B	4000/4000	46	4238	639



KNK44

EM / INDUSTRIAL TYRES

- Resistance to stone cuts, cracks and breaks
- Long wear-life

KNK44	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			mm	mm		
	6202061	6247	10.00-20 16PR	TT	283	1084	146 / 143	B	3000	109	3225	484
	6202062	6257	10.00-20 16PR	TL	283	1084	146 / 143	B	3000	109	3225	484



KNK65

EM / INDUSTRIAL TYRES

- Long wear-life
- Cracking / fatigue resistance at treads
- Maximum traction
- Increased sidewall protection

KNK65	New Product Code	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	6161042	6015	10-16.5 12PR	TL	282	775	138	A3	2360	84	2323	352
	6162052	6036	12-16.5 14PR	TL	320	846	148	A3	3150	90	2524	380



KNK66

EM / INDUSTRIAL TYRES

- High traction and comfort
- Designed compatible with scrap operations and recycling process
- Excellent maneuverability at high tonnage due to reinforced shoulder blocks.
- Comfortable drive due to flexible sidewall structure
- Reinforced back structure
- Longer life due to improved back structure
- Wear resistance due to special back combination

KNK66	New Product Code	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	6161142	6025	10-16.5 12PR	TL	282	775	138	A3	2360	84	2323	352
	6162152	6046	12-16.5 14PR	TL	320	846	148	A3	3150	90	2524	380
	6182052	6146	12.5/80-18 14PR	TL	305	983	146	A8	3000	62	2923	439



IND80

EM / INDUSTRIAL TYRES

- High traction and excellent self-cleaning feature in any conditions thanks to deep and corrugated tread structure
- Resistance to stone cuts, cracks and breaks
- Higher wear and root resistance thanks to using bar in the center
- Resistance to any kind of impacts
- Long wear-life

IND80

	New Product Code	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	6161242	6055	10-16.5 12PR	TL	256	793	138	A3	2360	84	2374	359
	6162252	6076	12-16.5 14PR	TL	297	858	148	A3	3150	90	2558	385
	6181042	6115	10.5/80-18 12PR	TL	271	892	135	A8	2180	62	2666	403
	6182152	6156	12.5/80-18 14PR	TL	285	955	146	A8	3000	62	2844	428
	6207062	6277	16.0/70-20 16PR	TL	385	1091	166	A2	5300	65	3244	487
	6207162	6277M	405/70-20 16PR	TL	385	1091	166	A2	5300	65	3244	487
	6243062	6287	15.5/80-24 16PR	TL	412	1269	162	A8	4750	72	3780	569
	6245062	6377	16.0/70-24 16PR	TL	418	1200	169	A2	5800	65	3584	541
	6245162	6377M	405/70-24 16PR	TL	418	1200	169	A2	5800	65	3584	541
	6246062	6397	16.9-24 16PR	TL	429	1310	154	A8	3750	46	3895	585
	6246162	6397M	440/80-24 16PR	TL	429	1310	154	A8	3750	46	3895	585
	6247052	6566	17.5L-24 14PR	TL	475	1277	154	A8	3750	46	3802	572
	6248052	6576	19.5L-24 14PR	TL	495	1314	154	A8	3750	38	3907	587
	6251052	6816	15.5-25 14PR	TL	400	1286	173	A2	6500	68	3836	578
	6261052	6516	18.4-26 14PR	TL	467	1425	160	A8	4500	42	4237	636
	6281052	6616	16.9-28 14PR	TL	429	1410	156	A8	4000	43	4210	635
	6281152	6616M	440/80-28 14PR	TL	429	1410	156	A8	4000	43	4210	635
	6301062	6957	16.9-30 16PR	TL	418	1466	156	A8	4000	47	4384	663



IND85

EM / INDUSTRIAL TYRES

- High traction and comfort
- Resistance to any kind of impacts with its back structure
- Comfortable drive due to flexible sidewall structure
- Reinforced bead design
- Reinforced sidewall structure
- Excellent maneuverability at high tonnage due to flexible sidewall structure
- Longer life with its reinforced tread pattern
- Strong tread compound against punctures and impacts
- Longer life due to increased tread number and improved tread depth

IND85	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	6182252	6136	12.5/80-18 14PR	TL	304	965	146	A8	3000	62	2872	432



IND88

EM / INDUSTRIAL TYRES

- Robust industrial pattern with higher resistance to puncture and tread wear
- Higher traction with wide pattern design at the center lug
- Reinforced bead design

IND88	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	6182352	6166	12.5/80-18 14PR	TL	308	987	146	A8	3000	62	2934	441
	6183052	6176	340/80-18 14PR	TL	343	1001	146	A8	3000	62	2974	446
	6207262	6187	16.0/70-20 16PR	TL	385	1091	166	A2	5300	65	3244	487
	6206052	6196	14.5-20 14PR	TL	355	1095	143	D	2725	51	3256	489



KNK70

EM / INDUSTRIAL TYRES

- Strong and durable thanks to excellent design
- Its compound resistant to wear, and its blocks resistant to heavy conditions with long maintenance periods
- Minimizing stretching at base with its strong blocks in its center

KNK70	New Product Code	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			mm	mm		
	6242002	6761	14.00-24 24PR	TL	375	1360	186	A2	9500	123	4037	605
	6242042	6765	14.00-24 32PR	TL	375	1360	190	A2	10600	145	4037	605
	6251062	6407	15.5-25 16PR	TL	384	1261	175	A2	6900	72	3765	568
	6252082	6419	17.5-25 20PR	TL	455	1371	181	A2	8250	83	4076	612
	6254002	6431	20.5-25 24PR	TL	531	1527	189	A2	10300	76	4517	674
	6255002	6451	23.5-25 24PR	TL	604	1625	196	A2	12500	68	4794	714
	6256022	6473	26.5-25 28PR	TL	702	1785	203	A2	15500	68	5246	778
	6256042	6475	26.5-25 32PR	TL	702	1785	206	A2	17000	79	5246	778
	6257042	6495	29.5-25 32PR	TL	758	1923	210	A2	19000	72	5637	833



KNK72

EM / INDUSTRIAL TYRES

- High traction and excellent self-cleaning feature in any conditions thanks to deep and corrugated tread structure
- Resistance to stone cuts, cracks and breaks
- Higher wear and root resistance thanks to using bar in the center
- Resistance to any kind of impacts
- Long wear-life

KNK72	New Product Code	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			mm	mm		
	6241062	6337	13.00-24 16PR	TL	335	1280	151	A8	3450	58	3811	573
	6242062	6357	14.00-24 16PR	TL	382	1354	153	A8	3650	54	4020	603



KNK74

EM / INDUSTRIAL TYRES

- Strong structure
- Increased tread depth and tread pattern providing optimum traction in muddy fields

KNK74	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	6244062	6297	16.00-24 16PR	TL	432	1493	160	A8	4000	47	4413	658



KNK77

COMPACTOR TYRES

- Wide shoulder and base width, blocked design
- High traction ability
- Anti-wear future thanks to its pattern appropriate for agricultural, industrial and off-road use
- Consisting durable blocks
- Easy use in soft grounds
- Balanced driving and easy control thanks to wide shoulder and blocks

KNK77	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	6262052	6536	23.1-26 14PR	TL	587	1580	166	A8	5300	33	4675	698



KNK88

COMPACTOR TYRES

- *Compressing ability for asphalt with its plane surfaced tread pattern*
- *Stable operation feature thanks to strong frame at sidewalls*

KNK88	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	6201041	6225	9.00-20 12 PR	TT	256	1002	157	A2	4125	94	2993	452
	6203061	6262	11.00-20 16 PR	TT	290	1040	168	A2	5600	107	3100	467



KNK40

FORKLIFT TYRES

- *High kilometer performance thanks to its special structure*
- *Comfortable driving thanks to excellent traction*
- *Maximum traction*
- *Long wear-life*
- *Resistance to any kind of impacts*

KNK40	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	6091042	9105	6,00-9 12PR	TT	165	544	121	A5	1450	145	1610	240
	6101042	9205	6,50-10 12PR	TT	181	592	125	A5	1650	110	1754	262
	6121052	9306	7,00-12 14PR	TT	195	674	134	A5	2120	110	2001	300
	6151052	9406	8,15-15 (28X9-15) 14PR	TT	220	710	146	A5	3000	145	2127	322
	6152072	9418	8,25-15 18PR	TT	240	840	153	A5	3650	145	2495	374



örka

**PRODUCED
BY EXPERTS
FOR SUCCESS**

**PRODUCT QUALITY AND RELIABILITY
FOR CUSTOMERS SEEKING THE BEST.**

LCV TYRES

KNK20

KNK24

KNK25

KNK126



örka



KNK20

LIGHT TRUCK & MINIBUS TYRES

- Strong frame structure and high wear resistance
- Balanced driving thanks to its corrugated pattern
- Increased water discharge thanks to its corrugated gutters
- Increased road bend ability and excellent traction
- Retreadability feature

KNK20	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	2141032	2104	6.50-14 10 PR	TT	171	647	100/98	L	800/750*	72	1918	287
	2151032	2144	7.50-15 10PR	TT	235	789	114/112	L	1180/1120*	76	2318	344
	2161032	2204	6.50-16 10PR	TT	176	748	108/107	L	1000/975*	73	2216	331
	2162032	2304	7.00-16 10PR	TT	198	785	113/112	L	1150/1120*	76	2317	345
	2163042	2405	7.50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	355



KNK24

LIGHT TRUCK & MINIBUS TYRES

- Balanced driving and excellent traction thanks to its special corrugated pattern
- Increased water and mud resistance thanks to its surrounding gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature

KNK24	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	2163142	2415	7.50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	355



KNK25

LIGHT TRUCK & MINIBUS TYRES

- Optimum performance in traction and brakes due to special deep back pattern
- Strong frame structure and high wear resistance
- Anti-stone increased water and mud resistance thanks to its surrounding gutters
- Retreadability feature

KNK25	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	2163242	2425	7,50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	355



KNK126

LIGHT TRUCK & MINIBUS TYRES

- Balanced driving and excellent traction thanks to its special corrugated pattern
- Increased water and mud resistance thanks to its surrounding gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature

KNK126	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	2151132	2154	7,50-15 10PR	TT	235	786	114/112	L	1180/1120*	76	2310	342
	2161132	2214	6,50-16 10PR	TT	176	748	108/107	L	1000/975*	73	2216	331
	2162132	2314	7,00-16 10PR	TT	198	785	113/112	L	1150/1120*	76	2317	345
	2163342	2435	7,50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	355

*Load Capacity per tyre on single axle with single tyre / Load capacity per tyre on single axle with dual tyres.

MPT TYRES

KNK10 KNK12 KNK14



örka



KNK10

MILITARY TYRES

- Wide base, designed for use at asphalt and off-road (land)
- Self-cleaning tread structure in asphalt use
- Suitable for any weather conditions, excellent traction
- High drift endurance due to diagonal tread structure

KNK10	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	6205072	7748	14.00-20 18PR	TT	375	1260	160/157	F	4500/4125*	100	3722	555
	6205082	7749	14.00-20 20PR	TT	375	1260	161/158	F	4625/4250*	108	3690	545



KNK12

MILITARY TYRES

- Pattern feature designed for non-road and highway use
- Excellent maneuverability due to nondirectional use feature

KNK12	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	6204042	7525	12.5-20 12PR	TT	325	1040	132	F	2000	51	3100	467



KNK14

MILITARY TYRES

- Military tyre for both off the road and highway application
- More resistance with multilayer carcass body across puncture
- Self-cleaning lug design

KNK14	New Product Code	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	Psi		
	6184022	7423	13.00-18 8PR	TT	354	1125	131	F	1950	43	3324	496



TOGETHER WE DESIGN THE FUTURE!

AS ÖZKA FAMILY, WE ALL WORK HARD
IN THE OFFICE, FACTORY, FARMS AND
CONSTRUCTION SITES TO BUILD
THE FUTURE TOGETHER!



örka

RIM DIAMETER	EQUIVALENCE TABLE OF INTERCHANGEABILITY FOR RADIAL AND DIAGONAL TYRES								
16	6.00 # 16	210/80 # 16	240/70 # 16	260/65 # 16					
16	6.50 # 16	260/70 # 16	280/65 # 16						
16	7.50 # 16	210/95 # 16	250/80 # 16	280/70 # 16	300/65 # 16	320/65 # 16			
16	8.25 # 16	300/70 # 16							
18	7.50 # 18	210/95 # 18	250/80 # 18	280/70 # 18	300/65 # 18	320/65 # 18			
18	10.5/80 # 18	300/70 # 18	340/65 # 18						
20	7.50 # 20	280/70 # 20							
20	9.5 # 20	8.00 # 20	250/85 # 20	260/80 # 20	300/70 # 20	340/65 # 20			
20	11.2 # 20	280/85 # 20	320/70 # 20						
20	12.4 # 20	320/85 # 20	340/80 # 20	340/75 # 20	360/70 # 20	420/65 # 20			
20	13.6 # 20	14.9L # 20	380/75 # 20	400/70 # 20	380/70 # 20	440/65 # 20			
20	12.4 # 28	320/85 # 28	360/70 # 28	420/65 # 28					
24	9.5 # 24	240/85 # 24	250/85 # 24	300/70 # 24	360/60 # 24				
24	11.2 # 24	280/85 # 24	320/70 # 24						
24	12.4 # 24	320/85 # 24	360/70 # 24	420/65 # 24					
24	13.6 # 24	340/85 # 24	380/75 # 24	380/70 # 24	400/70 # 24	440/65 # 24			
24	14.9 # 24	380/85 # 24	420/70 # 24	460/70 # 24	480/65 # 24				
24	16.9 # 24	420/85 # 24	480/70 # 24	480/75 # 24	540/65 # 24				
26	16.9 # 26	480/70 # 26	540/65 # 26						
26	18.4 # 26	460/85 # 26	520/70 # 26	580/70 # 26	750/50 # 26				
26	23.1 # 26	28 L # 26	620/75 # 26	650/70 # 26	750/65 # 26				
28	9.5 # 28	240/85 # 28	250/85 # 28	340/65 # 28					
28	11.2 # 28	280/85 # 28	320/70 # 28						
28	13.6 # 28	340/85 # 28	380/70 # 28	440/65 # 28	480/60 # 28				
28	14.9 # 28	380/85 # 28	420/70 # 28	420/75 # 28	480/65 # 28	520/60 # 28			
28	16.9 # 28	420/85 # 28	480/70 # 28	480/75 # 28	540/65 # 28	600/60 # 28			
28	18.4 # 28	540/75 # 28	600/65 # 28						
30	14.9 # 30	380/85 # 30	420/70 # 30						
30	16.9 # 30	420/90 # 30	420/85 # 30	480/70 # 30	480/75 # 30	540/65 # 30	600/60 # 30		
30	18.4 # 30	21L # 30	460/85 # 30	520/70 # 30	600/65 # 30	710/55 # 30			
30	23.1 # 30	620/75 # 30	650/70 # 30	710/65 # 30					
32	8.3 # 32	210/95 # 32							
32	9.5 # 32	230/95 # 32	270/80 # 32	270/75 # 32					
32	12.4 # 32	320/85 # 32							
32	24.5 # 32	650/75 # 32	680/70 # 32	800/60 # 32					
32	30.5 L # 32	710/75 # 32	680/75 # 32	800/65 # 32	850/60 # 32	900/55 # 32	1050/50 # 32		
34	14.9 # 34	380/85 # 34							
34	16.9 # 34	420/85 # 34	480/70 # 34	480/75 # 34	500/70 # 34	540/65 # 34	600/60 # 34		
34	18.4 # 34	460/85 # 34	520/70 # 34	520/75 # 34	540/70 # 34	600/65 # 34	710/55 # 34	800/50 # 34	
34	20.8 # 34	23.1 # 34	620/75 # 34	710/70 # 34	650/65 # 34	710/60 # 34			
36	8.3 # 36	210/95 # 36							
36	12.4 # 36	320/85 # 36							
36	13.6 # 36	340/85 # 36							
36	9.5 # 36	230/95 # 36	270/80 # 36						
36	11.2 # 36	270/95 # 36							
38	9.5 # 38	230/95 # 38							
38	11.2 # 38	270/95 # 38	290/90 # 38						
38	12.4 # 38	320/85 # 38							
38	13.6 # 38	15.5 # 38	340/85 # 38	380/80 # 38	400/75 # 38				
38	14.9 # 38	380/85 # 38							
38	16.9 # 38	420/85 # 38	480/70 # 38	480/75 # 38	540/65 # 38	600/60 # 38			
38	18.4 # 38	460/85 # 38	520/70 # 38	520/75 # 38	600/65 # 38	650/60 # 38			
38	20.8 # 38	520/85 # 38	580/70 # 38	620/70 # 38	650/65 # 38	710/65 # 38	710/60 # 38	850/50 # 38	
42	9.5 # 42	230/95 # 42							
42	11.2 # 42	270/95 # 42	300/85 # 42						
42	12.4 # 42	300/95 # 42							
42	18.4 # 42	460/85 # 42	480/80 # 42	600/65 # 42					
42	20.8 # 42	520/85 # 42	580/70 # 42	620/70 # 42	650/65 # 42	750/60 # 42	710/60 # 42	850/55 # 42	900/50 # 42
44	8.3 # 44	210/95 # 44							
44	9.5 # 44	230/95 # 44							
46	12.4 # 46	270/95 # 46	300/95 # 46	320/90 # 46	340/85 # 46				
46	20.8 # 46	520/85 # 46	650/65 # 46	620/70 # 46					
48	9.5 # 48	230/95 # 48							
48	13.6 # 48	340/85 # 48							

Notes

" # "Symbol can be replaced with " R " for radial, "-" or "D" for Diagonal Tires



HEADQUARTER/FACTORY

Mahmutpaşa Mah. Kanalyolu Cad. No: 129 41140

Başıskele/Kocaeli TURKEY

Tel: +90 262 349 50 00

info@ozkalastik.com

SALES OFFICE/WAREHOUSE

Yaylacık Mah. Metin Sok. No:1

Başıskele/Kocaeli TURKEY

Tel: +90 262 349 50 00

info@ozkalastik.com



ozkalastik



ozkalastik



ozkalastik



ÖZKA Tyre

www.ozkatyres.com